



Controllable Bridge Rectifiers

SKB 33

Features

- Half controlled, single phase rectifier with freewheeling diode
- Isolated metal case with screw terminals
- Blocking voltage up to 1200 V
- High surge currents
- Easy chassis mounting


Typical Applications

- Power supplies for electronic equipment
- DC motors
- Field rectifiers for DC motors
- Battery charger rectifiers

- 1) Freely suspended or mounted on an insulator
- 2) Mounted on a painted metal sheet of min. 250 x 250 x 1 mm

V_{RSM} V	V_{RRM}, V_{DRM} V	$I_D = 33$ A (full conduction) ($T_c = 62$ °C)
300	200	SKB 33/02
500	400	SKB 33/04
700	600	SKB 33/06
900	800	SKB 33/08
1100	1000	SKB 33/10
1300	1200	SKB 33/12

Symbol	Conditions	Values	Units
I_D	$T_a = 45$ °C isolated ¹⁾	6,5	A
	$T_a = 45$ °C; chassis ²⁾	14	A
	$T_a = 45$ °C; P1A/120	24	A
	$T_a = 35$ °C; P1A/120 F	32	A
I_{TSM}, I_{FSM}	$T_{vj} = 25$ °C; 10 ms	370	A
	$T_{vj} = 130$ °C; 10 ms	340	A
i^2t	$T_{vj} = 25$ °C; 8,3 ... 10 ms	680	A ² s
	$T_{vj} = 130$ °C; 8,3 ... 10 ms	580	A ² s
V_T	$T_{vj} = 25$ °C; $I_T = 75$ A	max. 2,4	V
$V_{T(TO)}$	$T_{vj} = 130$ °C;	max. 1	V
r_T	$T_{vj} = 130$ °C	max. 15	mΩ
I_{DD}, I_{RD}	$T_{vj} = 130$ °C; $V_{DD} = V_{DRM}; V_{RD} = V_{RRM}$	max. 10	mA
t_{gd}	$T_{vj} = 25$ °C; $I_G = 1$ A; $di_G/dt = 1$ A/μs	1	μs
t_{gr}	$V_D = 0,67 \cdot V_{DRM}$	1	μs
$(dv/dt)_{cr}$	$T_{vj} = 130$ °C	max. 200	V/μs
$(di/dt)_{cr}$	$T_{vj} = 130$ °C; $f = 50$ Hz	max. 50	A/μs
t_q	$T_{vj} = 130$ °C; typ.	80	μs
I_H	$T_{vj} = 25$ °C; typ. / max.	20 / 200	mA
I_L	$T_{vj} = 25$ °C; $R_G = 33$ Ω; typ. / max.	80 / 400	mA
V_{GT}	$T_{vj} = 25$ °C; d.c.	min. 3	V
I_{GT}	$T_{vj} = 25$ °C; d.c.	min. 100	mA
V_{GD}	$T_{vj} = 130$ °C; d.c.	max. 0,25	V
I_{GD}	$T_{vj} = 130$ °C; d.c.	max. 3	mA
$R_{th(j-c)}$	per thyristor / diode	2,6	K/W
	total	0,65	K/W
$R_{th(c-s)}$	total	0,06	K/W
T_{vj}		- 40 ... + 130	°C
T_{stg}		- 55 ... + 150	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3000 (2500)	V
M_s	to heatsink	5 ± 15 %	Nm
M_t	to terminals	3 ± 15 %	Nm
m		250	g
Case		G 16	

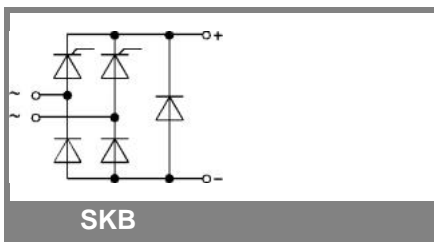

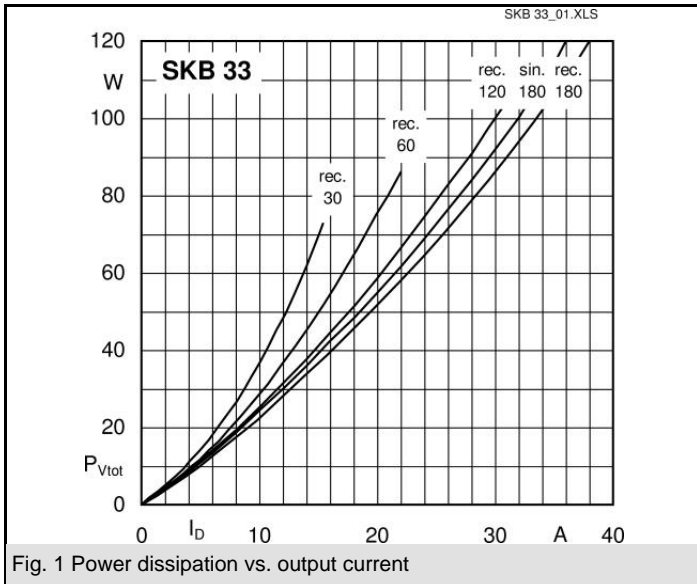


Fig. 1 Power dissipation vs. output current

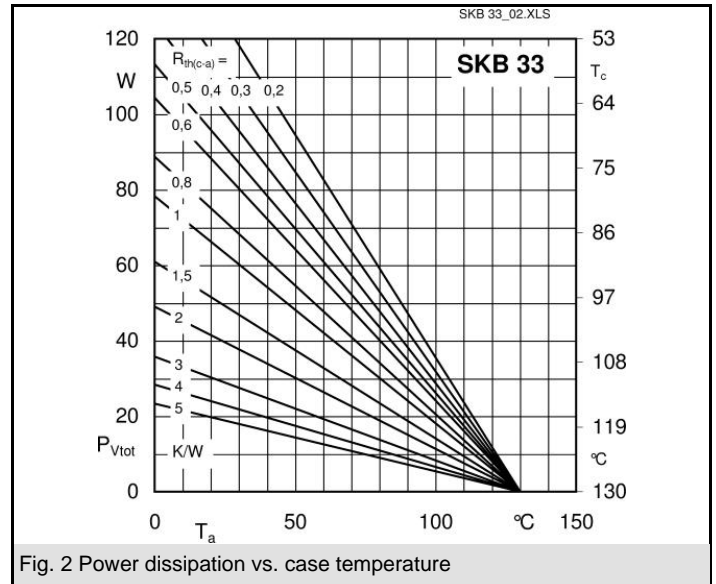


Fig. 2 Power dissipation vs. case temperature

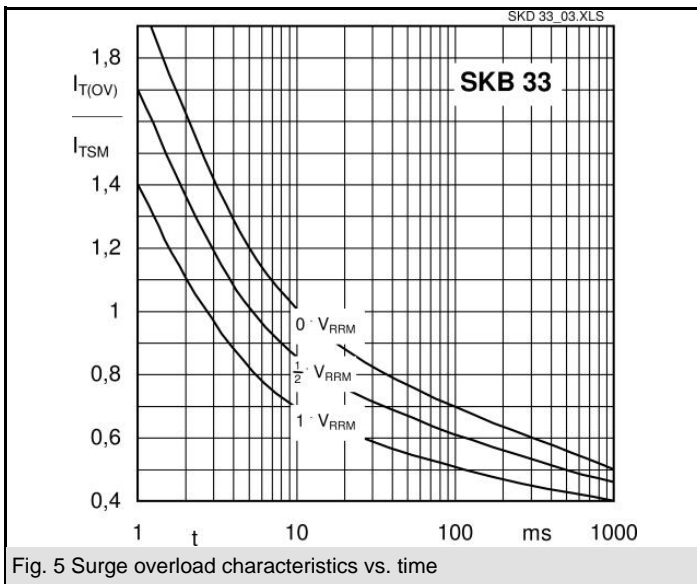


Fig. 5 Surge overload characteristics vs. time

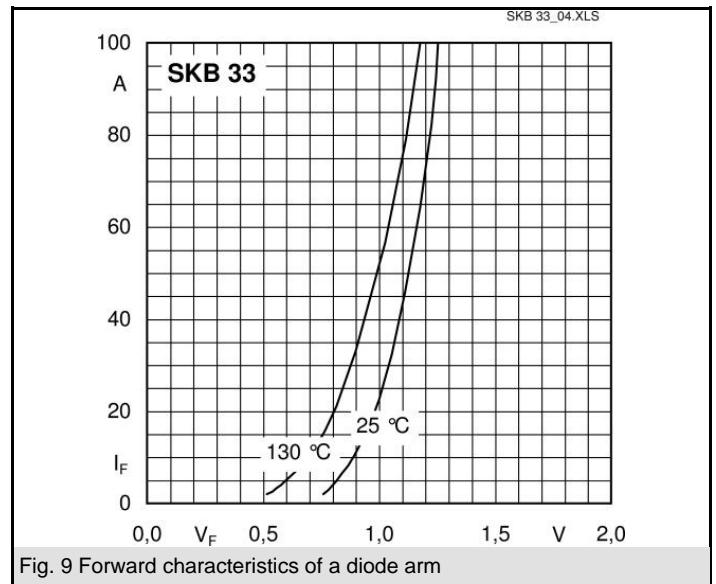


Fig. 9 Forward characteristics of a diode arm

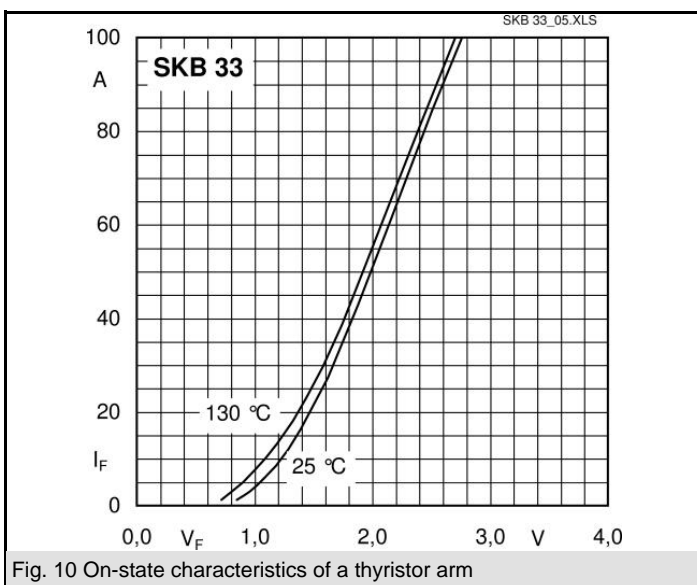


Fig. 10 On-state characteristics of a thyristor arm



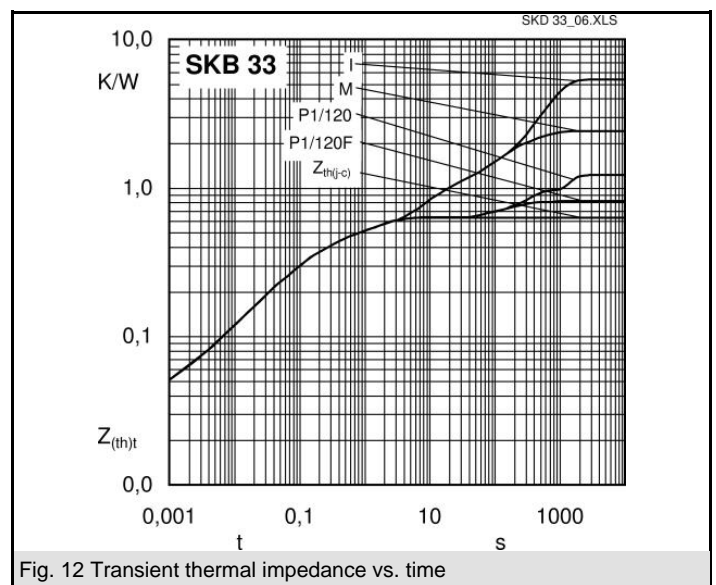


Fig. 12 Transient thermal impedance vs. time

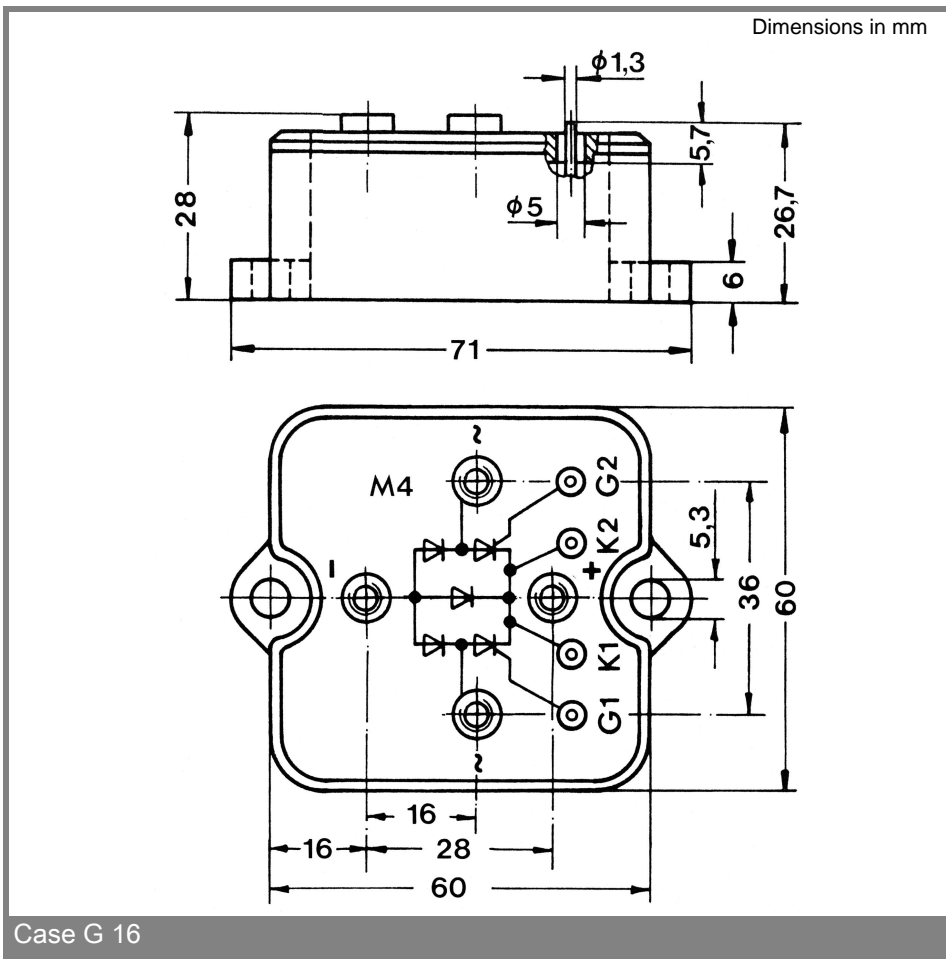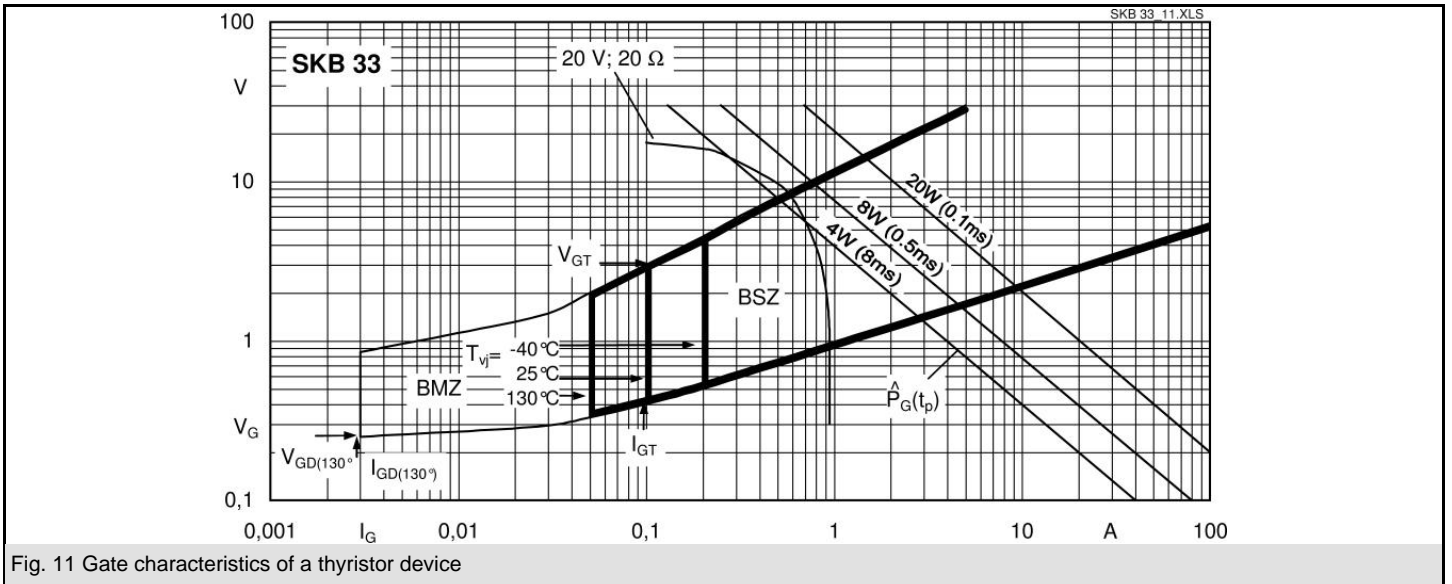

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.