


# FRA 3A ... FRA 3M



## Surface mount diode

## Fast Avalanche Diodes

### FRA 3A ... FRA 3M

**Forward Current: 3 A**

**Reverse Voltage: 50 to 1000 V**

## Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

## Mechanical Data

- Plastic case: SMC / DO-214AB
- Weight approx.: 0,21 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 3000 pieces per reel

1) Max. temperature of the terminals  $T_T = 100^\circ\text{C}$

2)  $I_F = 3 \text{ A}$ ,  $T_J = 25^\circ\text{C}$

3)  $T_A = 25^\circ\text{C}$

4) Mounted on P.C. board with 50 mm<sup>2</sup> copper pads at each terminal

Type	Polarity color band	Repetitive peak reverse voltage $V_{RRM}$ V	Surge peak reverse voltage $V_{RSM}$ V	Maximum forward voltage $T_j = 25^\circ\text{C}$ $I_F = 3 \text{ A}$ $V_F$ <sup>2)</sup> V	Maximum reverse recovery time $I_F = 0,5 \text{ A}$ $I_R = 1 \text{ A}$ $I_{RR} = 0,25 \text{ A}$ $t_{rr}$ ns
FRA 3A	-	50	50	1,3	150
FRA 3B	-	100	100	1,3	150
FRA 3D	-	200	200	1,3	150
FRA 3G	-	400	400	1,3	150
FRA 3J	-	600	600	1,3	250
FRA 3K	-	800	800	1,3	500
FRA 3M	-	1000	1000	1,3	500

## Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$ , unless otherwise specified


Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_T = 100^\circ\text{C}$ <sup>1)</sup>	3	A
$I_{FRM}$	Repetitive peak forward current $f > 15 \text{ Hz}$ <sup>1)</sup>	15	A
$I_{FSM}$	Peak fwd. surge current 50 Hz half sinus-wave <sup>3)</sup>	100	A
$I_{rt}$	Rating for fusing, $t < 10 \text{ ms}$ <sup>3)</sup>	50	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient <sup>4)</sup>	50	K/W
$R_{thT}$	Max. thermal resistance junction to terminals	10	K/W
$T_j$	Operating junction temperature	- 50 ... + 150	°C
$T_s$	Storage temperature	- 50 ... + 150	°C

## Characteristics

$T_A = 25^\circ\text{C}$ , unless otherwise specified

Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_j = 25^\circ\text{C}$ ; $V_R = V_{RRM}$ $T_j = ?^\circ\text{C}$ ; $V_R = V_{RRM}$	<3	µA
$C_J$	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $dI_F/dt = A/\text{ms}$ )	-	µC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $L = 40 \text{ mH}$ ; $T_j = 25^\circ\text{C}$ ; inductive load switched off)	20	mJ

Dimensions in mm



case: SMC / DO-214AB

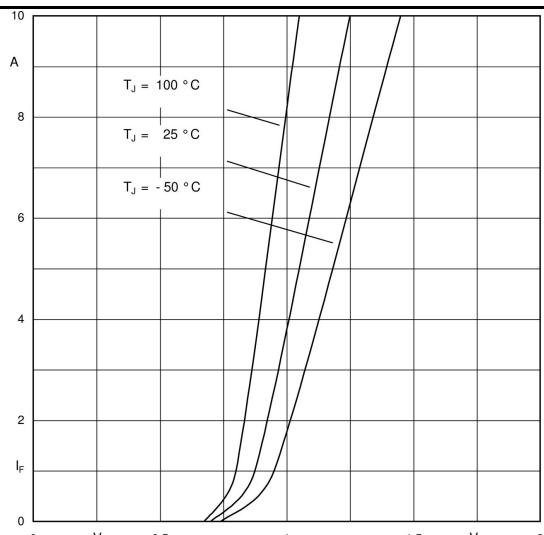


Fig. 1 Forward characteristics (typical values)

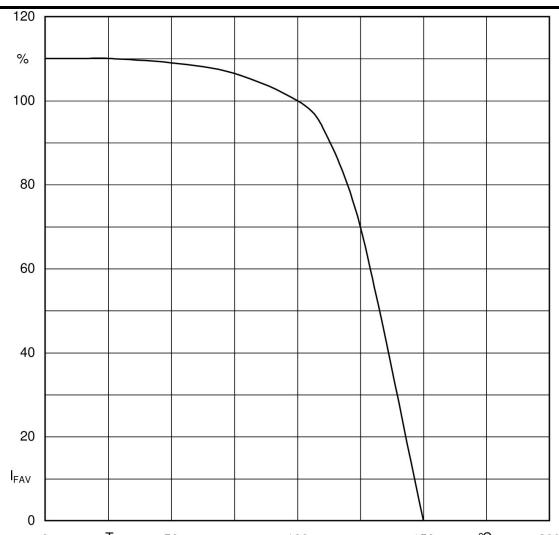


Fig. 2 Rated forward current vs. temp. of the terminals<sup>4)</sup>