

SKKT 500, SKKH 500



SEMIPACK[®] 5

Thyristor / Diode Modules

SKKT 500

SKKH 500

Features

- Heat transfer through aluminium nitride ceramic isolated metal baseplate
- Precious metal pressure contacts for high reliability
- UL recognized, file no. E 63 532

Typical Applications

- AC motor softstarters
- Input converters for AC inverter drives
- DC motor control (e. g. for machine tools)
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

1) See the assembly instructions

2) The screws must be lubricated

| V_{RSM} V | V_{RRM}, V_{DRM} V | $I_{TRMS} = 920$ A (maximum value for continuous operation) $I_{TAV} = 500$ A (sin. 180; $T_c = 89$ °C) | |
|----------------|-------------------------|--|--------------|
| 900 | 800 | SKKT 500/08E | SKKH 500/08E |
| 1300 | 1200 | SKKT 500/12E | SKKH 500/12E |
| 1500 | 1400 | SKKT 500/14E | SKKH 500/14E |
| 1700 | 1600 | SKKT 500/16E | SKKH 500/16E |
| 1900 | 1800 | SKKT 500/18E | SKKH 500/18E |







| Symbol | Conditions | Values | Units |
|------------------|---|-------------------------|------------------|
| I_{TAV} | sin. 180; $T_c = 85$ (100) °C; | 540 (390) | A |
| I_D | P16/200F; $T_a = 35$ °C; B2 / B6 | 665 / 845 | A |
| I_{RMS} | P16/300F; $T_a = 35$ °C; W1 / W3 | 850 / 3 * 670 | A |
| I_{TSM} | $T_{vj} = 25$ °C; 10 ms | 17000 | A |
| | $T_{vj} = 130$ °C; 10 ms | 15000 | A |
| i^2t | $T_{vj} = 25$ °C; 8,3 ... 10 ms | 1445000 | A ² s |
| | $T_{vj} = 130$ °C; 8,3 ... 10 ms | 1125000 | A ² s |
| V_T | $T_{vj} = 25$ °C; $I_T = 1700$ A | max. 1,5 | V |
| $V_{T(TO)}$ | $T_{vj} = 130$ °C | max. 0,925 | V |
| r_T | $T_{vj} = 130$ °C | max. 0,27 | mΩ |
| I_{DD}, I_{RD} | $T_{vj} = 130$ °C; $V_{RD} = V_{RRM}, V_{DD} = V_{DRM}$ | max. 100 | mA |
| t_{gd} | $T_{vj} = 25$ °C; $I_G = 1$ A; $di_G/dt = 1$ A/μs | 1 | μs |
| t_{gr} | $V_D = 0,67 * V_{DRM}$ | 2 | μs |
| $(di/dt)_{cr}$ | $T_{vj} = 130$ °C | max. 200 | A/μs |
| $(dv/dt)_{cr}$ | $T_{vj} = 130$ °C | max. 1000 | V/μs |
| t_q | $T_{vj} = 130$ °C | 100 ... 200 | μs |
| I_H | $T_{vj} = 25$ °C; typ. / max. | 150 / 500 | mA |
| I_L | $T_{vj} = 25$ °C; $R_G = 33$ Ω; typ. / max. | 300 / 2000 | mA |
| V_{GT} | $T_{vj} = 25$ °C; d.c. | min. 3 | V |
| I_{GT} | $T_{vj} = 25$ °C; d.c. | min. 200 | mA |
| V_{GD} | $T_{vj} = 130$ °C; d.c. | max. 0,25 | V |
| I_{GD} | $T_{vj} = 130$ °C; d.c. | max. 10 | mA |
| $R_{th(j-c)}$ | cont.; per thyristor / per module | 0,062 / 0,031 | K/W |
| $R_{th(j-c)}$ | sin. 180; per thyristor / per module | 0,065 / 0,032 | K/W |
| $R_{th(j-c)}$ | rec. 120; per thyristor / per module | 0,07 / 0,035 | K/W |
| $R_{th(c-s)}$ | per thyristor / per module | 0,02 / 0,01 | K/W |
| T_{vj} | | - 40 ... + 130 | °C |
| T_{stg} | | - 40 ... + 130 | °C |
| V_{isol} | a. c. 50 Hz; r.m.s.; 1 s / 1 min. | 3600 / 3000 | V~ |
| M_s | to heatsink | 5 ± 15 % ¹⁾ | Nm |
| M_t | to terminals | 12 ± 15 % ²⁾ | Nm |
| a | | 5 * 9,81 | m/s ² |
| m | approx. | 1420 | g |
| Case | SKKT | A 60 a | |
| | SKKH | A 66 a | |







SKKT

SKKH




SKKT 500, SKKH 500

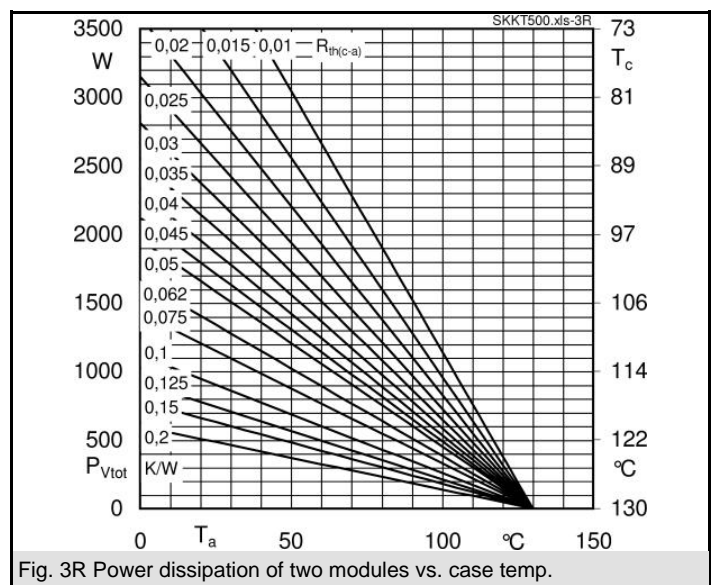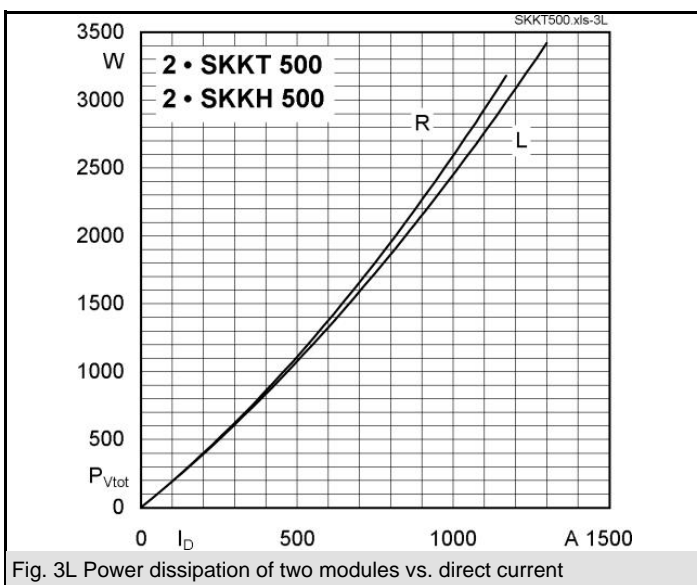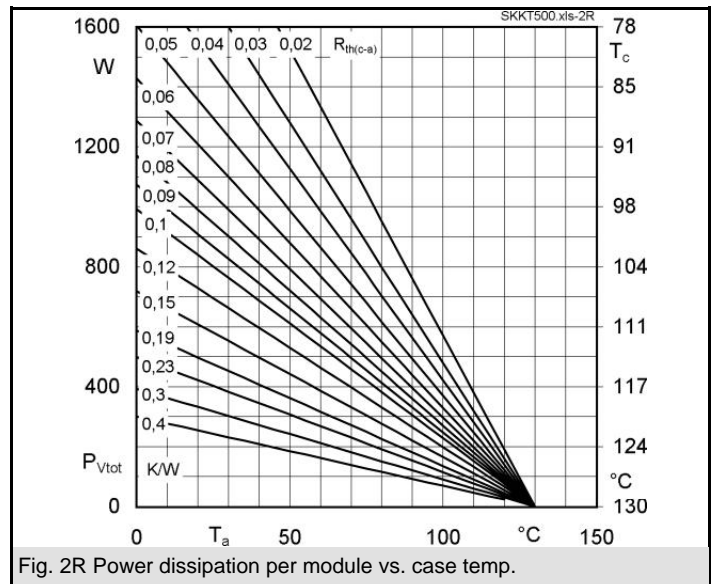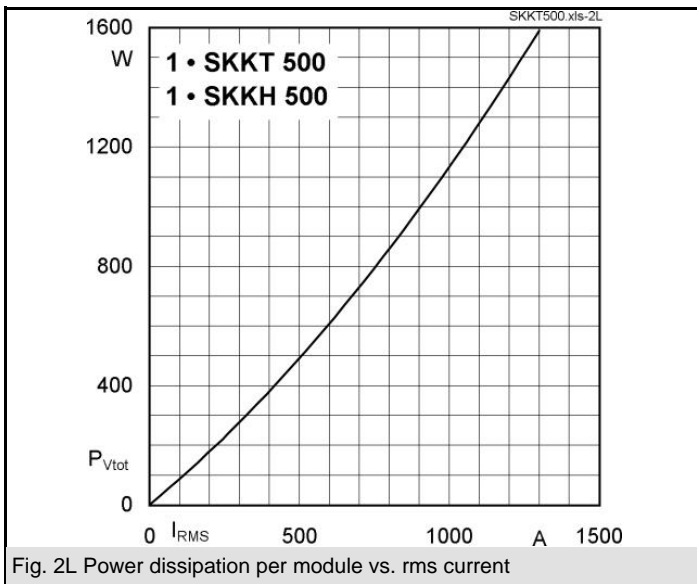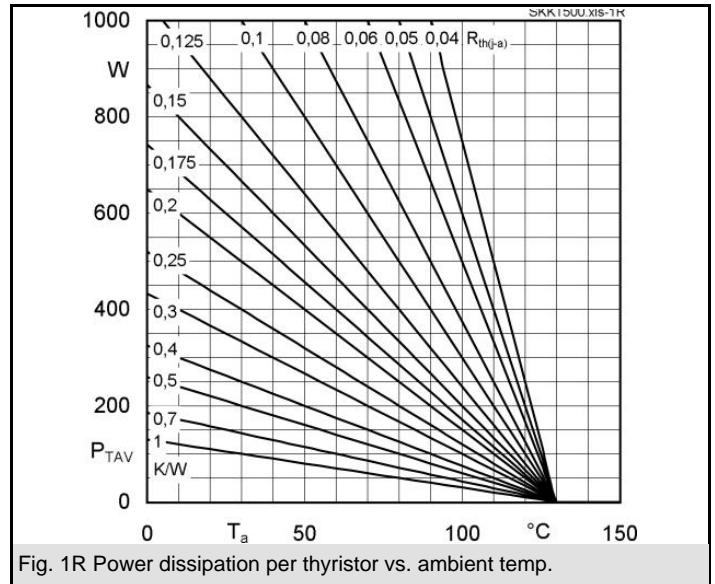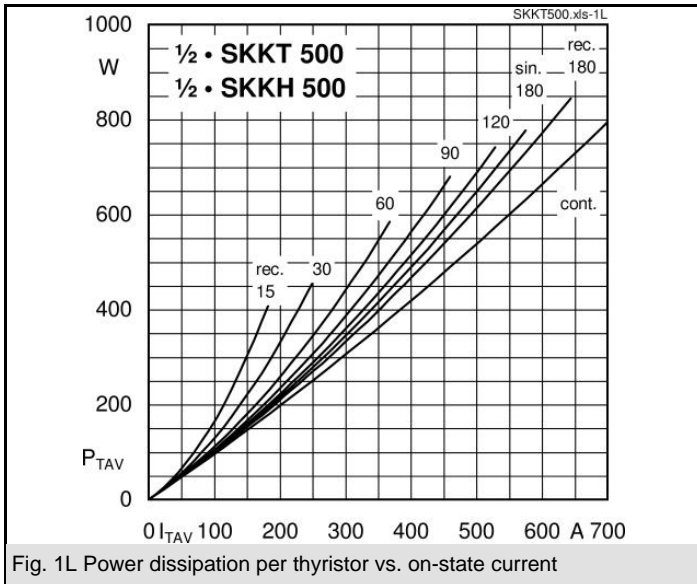

SKKT 500, SKKH 500

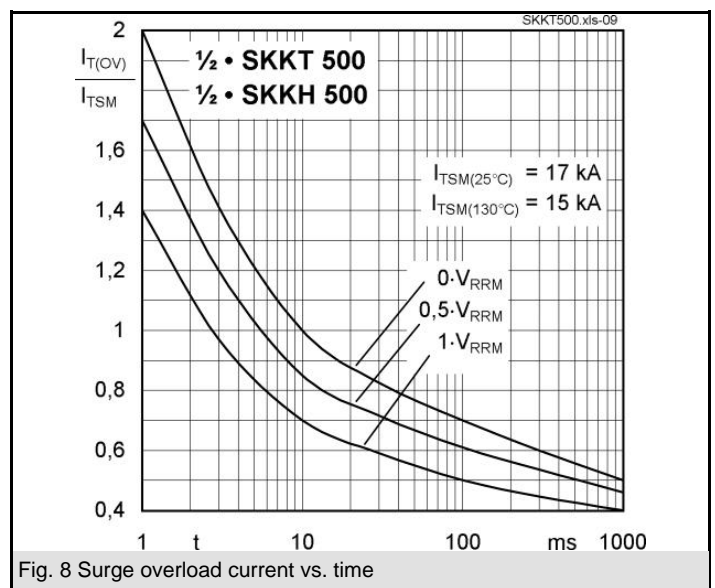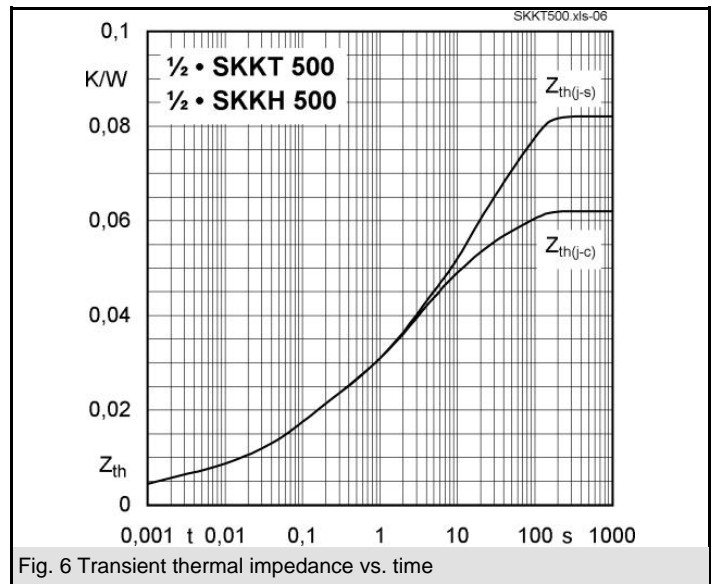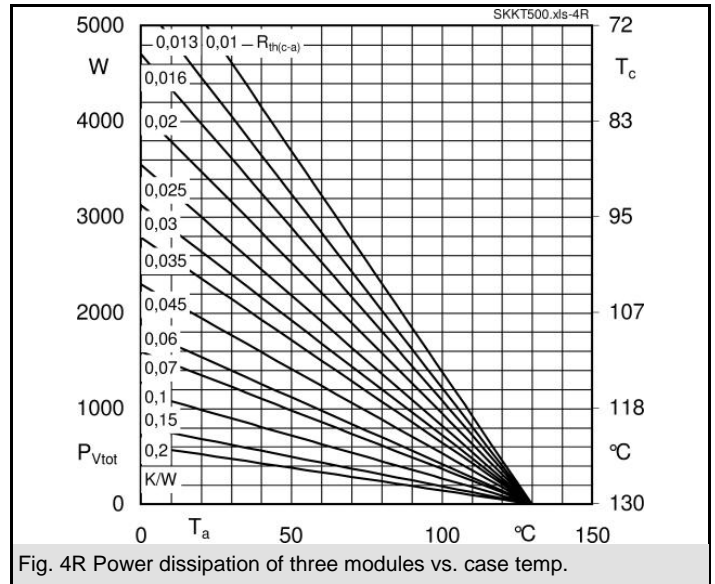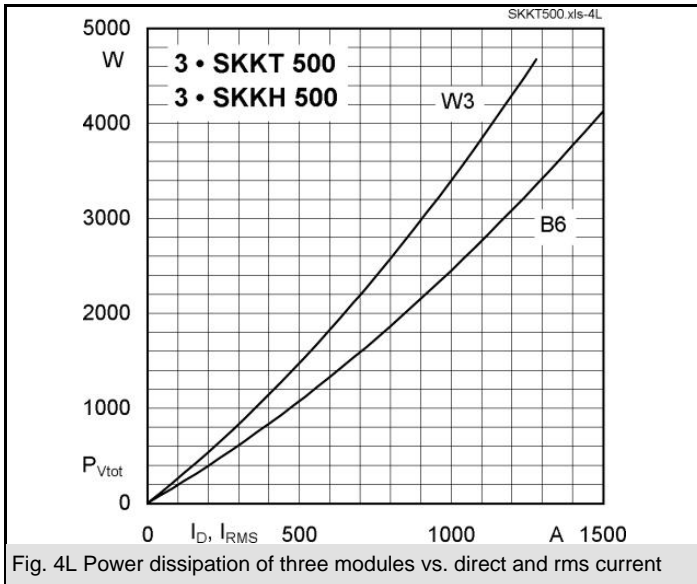

SKKT 500, SKKH 500

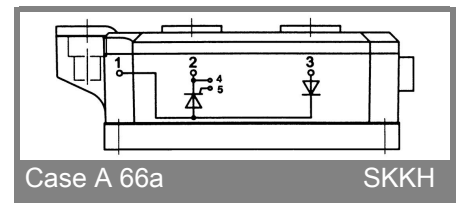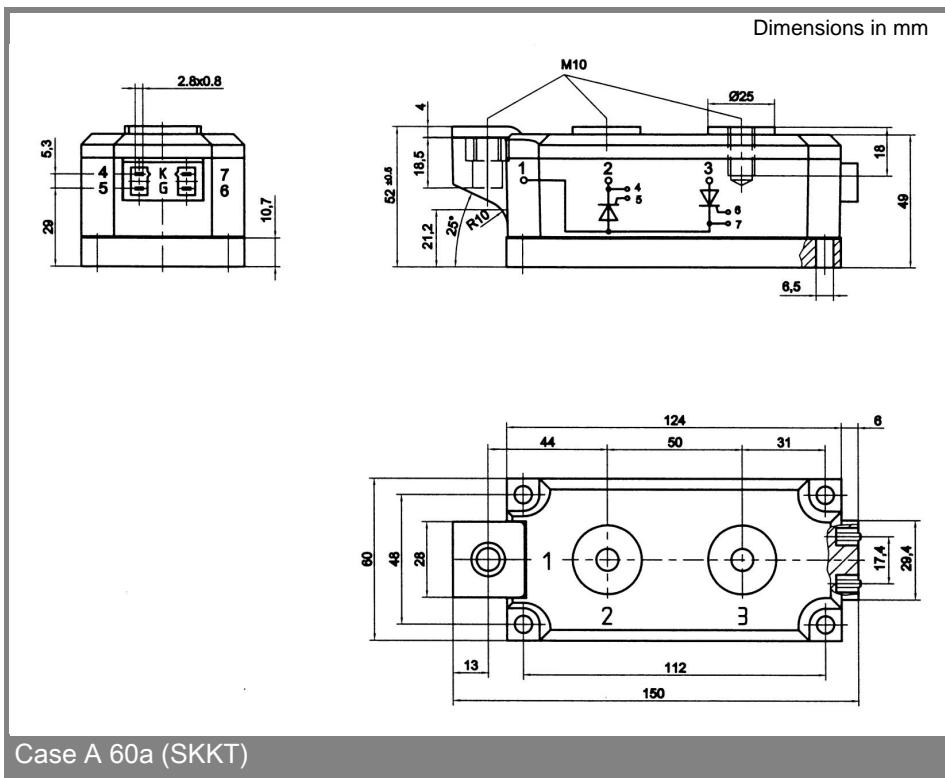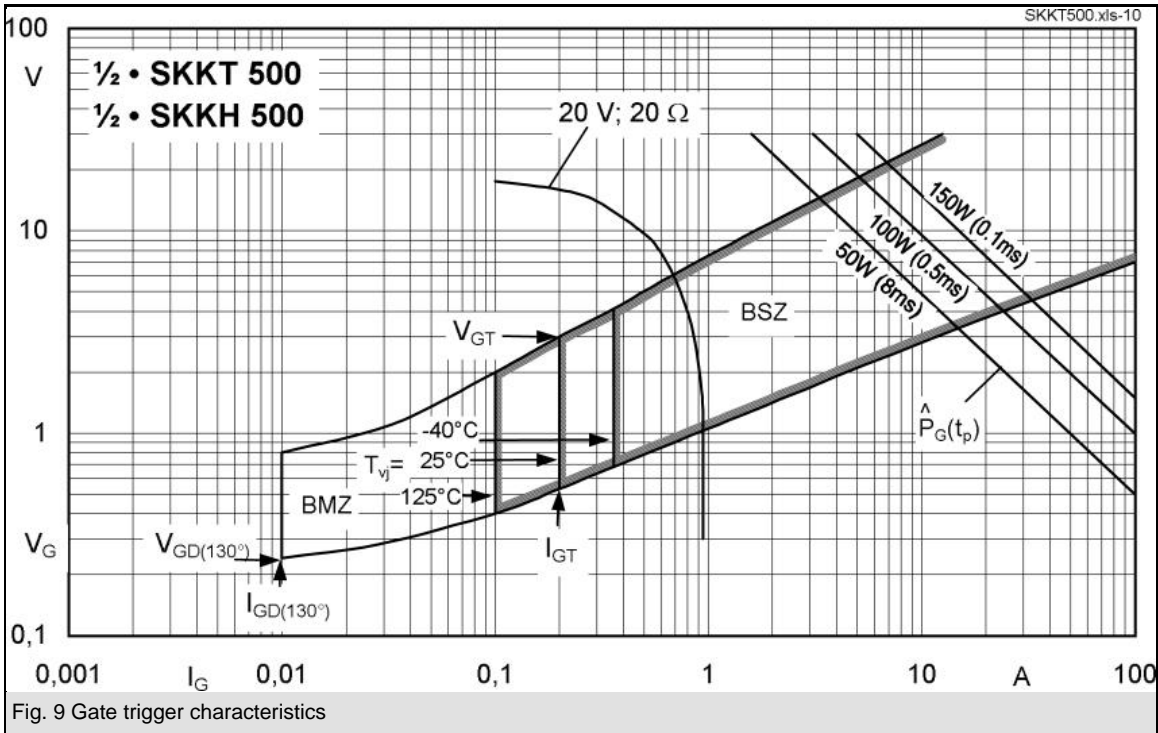

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.